



VC-6734 Conventional Sounder

BEIJING VSAIL FIRE PROTECTION EQUIPMENT CO. LTD.

BUILDING 32, HUILONGSEN TECHNOLOGY PARK, NO.99 14TH KECHUANG STREET, BDA, BEIJING, PRC 100176

FEATURES


- * Audial and visual warning
- * 16 tones available
- * No external power supply required
- * Fast responding time and low power consumption
- * Plug-in structure and easy installation
- * Used in conventional sounder circuit only
- * LPCB approval to EN54-3



DESCRIPTION


VC-6734 Conventional Sounder Strobe, is connected with conventional sounder output to provide audible and visual alert of fire alarm. When the sounder output is activated, VC-6734 will generate alarm sound and warning flash, and then can be silenced by manually control on control panel. Moreover, there are 16 tones selectable via the dip-switch. This sounder could be connected with conventional sounder output only, either from control panel or interface.

DIMENSION

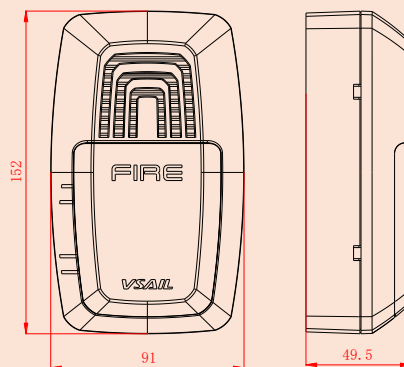

WIRING INSTRUCTION

DC24V Supply 24V (+)
(polarity) 0V (-)

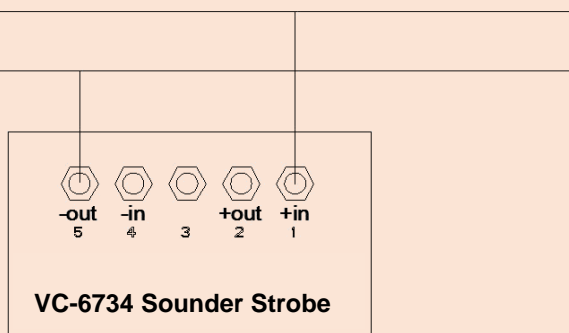

TECHNICAL DATA

Operating Voltage	20VDC~28VDC	Temperature	-10°C~+50°C
Action Current	≤50mA	Humidity	≤95%, non condensing
Flashing Frequency	1.4x(1±20%)Hz	Alarm Tone	16 types
Material of Enclosure	ABS	IP Rating	21C
Dimension (LxWxH)	152mmX91mmX49.5mm	Weight	210g



VC-6741 Conventional Alarm Bell

BEIJING VSAIL FIRE PROTECTION EQUIPMENT CO. LTD.

BUILDING 32, HUILONGSEN TECHNOLOGY PARK, NO.99 14TH KECHUANG STREET, BDA, BEIJING, PRC 100176

FEATURES


- * Low power consumption
- * Easily accessible wiring terminal block
- * Highly compatible with conventional products
- * Wall-mount or standard mounting box installation



DESCRIPTION

VC-6741 Conventional Alarm Bell is an essential sounder alarming device, which takes low power consumption but reach the maximum performance. This product is special designed for easy installation that it is suitable either for wall-mount or any standard mounting box. It also comes with wiring terminal blocks which makes it easy to be connected.

DIMENSION

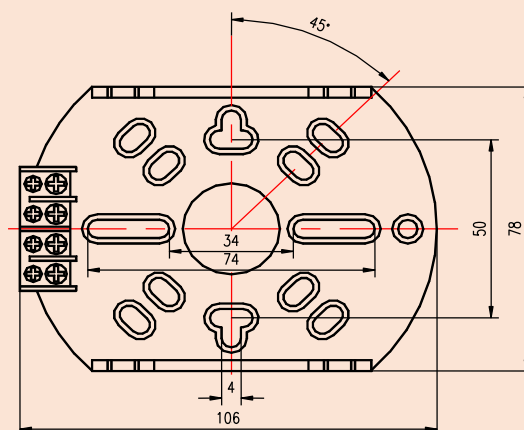

TECHNICAL DATA

Operating Voltage	24VDC
Alarm Current	≤20mA
Alarm Volume	≥95dB
Temperature	0℃ ~ 50℃
Humidity	≤95%RH (40±2℃)
Dimension	Diameter 152mm
Appearance Color	Red